



GAMMA SERIES

# LLG135A Slow Speed Gensets

50 Hz, 1500r/min | 60 Hz, 1800r/min

135 kVA / 108 kW | 150 kVA / 120 kW

LLG135A Genset



## BASIC CHARACTERISTICS

- 50 Hz, 1500 r/min or 60 Hz, 1800 r/min
- Lister Petter Gamma series liquid cooled, direct injection diesel engine
- naturally aspirated or turbocharged
- acoustic set (LLGA)

## STANDARD FEATURES

- DSE6020 control system with electronic digital control module
- single bearing, 4-pole brushless alternator
- 10 hour fuel tank
- powder coated base plate with forklift pockets
- anti-vibration mountings
- 12V starter battery and leads
- emergency stop button
- pusher fan
- operators' handbook
- electrical diagrams
- acoustic canopy
- residential exhaust silencer
- roof mounted lifting eye
- tough paint finish
- large doors for easy service access
- document pocket in access door

## ALTERNATOR DATA

- alternator model Lister Petter - SLG274E 50 Hz, SLG274D 60 Hz
- PF 0.8
- 3 phase
- insulation class H
- protection class IP21
- AS440 AVR
- self excited

## ALTERNATOR CERTIFICATION

- GB 755, BSEN 60034
- BS5000, VDE 0530, NEMA MG1-32
- IEC 34, CSA C 22.2-100, AS 1359


**POWER OUTPUTS**

			50 Hz, 1500 r/min		60 Hz, 1800 r/min	
			Three phase		Three phase	
Model	Engine	Rating	kVA	kWe	kVA	kWe
LLG135/A	GWTA615/18	Prime	135	108	136	109
		Standby	149	119	150	120

**APPROXIMATE FUEL CONSUMPTION | 100% LOAD**

Model	Engine		50 Hz, 1500 r/min	60 Hz, 1800 r/min
LLG135/A	GWTA615/18	litres/hour	31.0	34.5

**APPROXIMATE DIMENSIONS AND WEIGHT**

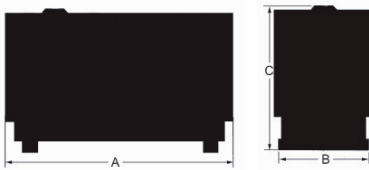

		LLG135A (acoustic)
Length (A)	mm	3200
Width (B)	mm	1100
Height (C)	mm	1470
Dry weight	kg	2010

A comprehensive range of options allows you to select a specification that matches your requirements. Please ask your Lister Petter Power Systems distributor (see panel below right).



**Head Office**

Lister Petter Power Systems Limited  
 Broadmeadow Industrial Estate  
 Teignmouth, TQ14 9AE

**Distributor Address**

+44 (0) 1285 702211  
 sales@listerpetter.com  
 www.listerpetter.com